



## Optical Connectivity

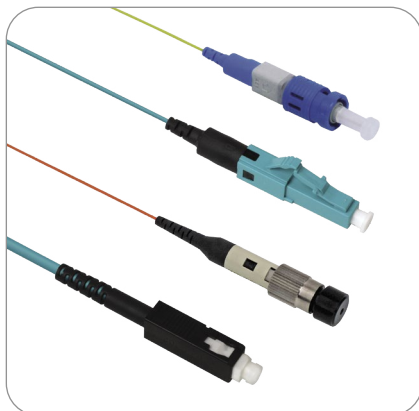

FUSEConnect Connectors (SC, FC, LC, ST)

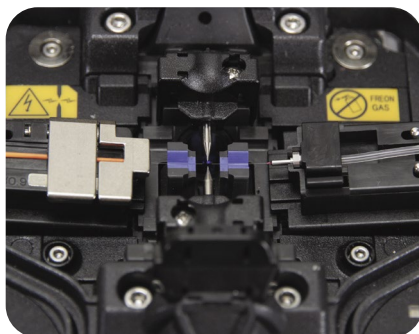

FUSEConnect in Fusion Splicer

### FUSEConnect® Fusion-Spliced, Field-Installable Connectors

AFL's FUSEConnect fusion-spliced, field installable connectors are uniquely designed and feature only four to five components. The factory pre-polished ferrule eliminates the need for polishing, adhesives, and crimping in the field, which minimizes the potential for operator error and expensive connector scrap.

FUSEConnect utilizes a fusion splicer to terminate the connector in the field, addressing return loss concerns present in analog optical networks. This advanced process yields true APC performance for SC/APC and LC/APC configurations. FUSEConnect is compatible with Fujikura fusion splicers and most other fiber holder-based fusion splicing platforms.

#### Features



- Field installable
- No adhesives, crimping or polishing
- True APC performance
- Compatible with most fusion splicers

#### Applications


- Connectorization in:
  - RF-overlay FTTP networks
  - Cable TV backbone networks
  - Outside plant
  - FTTH
  - MDU FTTP Cabling
- Central office connector replacement
- Data center installation

#### Specifications

PARAMETER	VALUE
Connector Type	SC, LC, FC, ST
Cable Type	900 $\mu$ m, 2 mm, 3 mm, 4.8 mm (SC only)
Polish	APC, UPC, PC
Insertion Loss	SM: 0.15 dB (average), 0.25 dB (maximum) / MM: 0.10 dB (average), 0.25 dB (maximum)
Return Loss	SM: $\leq$ -65 dB (APC), $\leq$ -55 dB (UPC) / MM: $\leq$ -35 dB (PC)

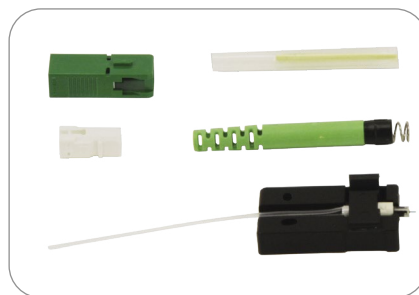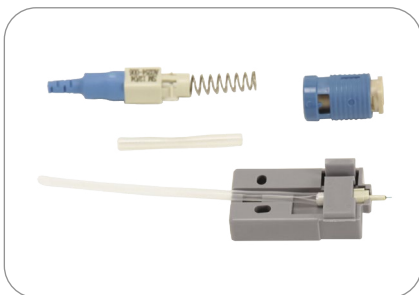

FUSEConnect Kits—ST (blue), SC (green), LC (blue)

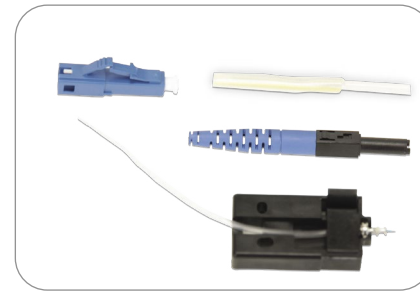



## FUSEConnect® Fusion-Spliced, Field-Installable Connectors

### Ordering Information

CONNECTOR TYPE	BOOT TYPE	AFL NO.*				
		UPC SM (Blue)	APC SM (Green)	PC 62.5 µm MM (Beige)	PC 50 µm MM (Black)	PC 50 µm LOMMF (AQUA) **
SC	900 µm	FUSE-SC9SMU-6	FUSE-SC9SMA-6	FUSE-SC9M62-6	FUSE-SC9M50-6	FUSE-SC9M50L-6
	3 mm	FUSE-SC3SMU-6	FUSE-SC3SMA-6	FUSE-SC3M62-6	FUSE-SC3M50-6	FUSE-SC3M50L-6
	4.8 mm	—	FUSE-SC48SMA-6	—	—	—
LC	900 µm	FUSE-LC9SMU-6	FUSE-LC9SMA-6	FUSE-LC9M62-6	FUSE-LC9M50-6	FUSE-LC9M50L-6
	2 mm	FUSE-LC2SMU-6	FUSE-LC2SMA-6	FUSE-LC2M62-6	FUSE-LC2M50-6	FUSE-LC2M50L-6
FC	900 µm	FUSE-FC9SMU-6	FUSE-FC9SMA-6	FUSE-FC9M62-6	FUSE-FC9M50-6	FUSE-FC9M50L-6
	2 mm	FUSE-FC2SMU-6	—	FUSE-FC2M62-6	FUSE-FC2M50-6	FUSE-FC2M50L-6
	3 mm	FUSE-FC3SMU-6	—	FUSE-FC3M62-6	FUSE-FC3M50-6	FUSE-FC3M50L-6
ST	900 µm	FUSE-ST9SMU-6	—	FUSE-ST9M62-6	FUSE-ST9M50-6	FUSE-ST9M50L-6
	2 mm	FUSE-ST2SMU-6	—	FUSE-ST2M62-6	FUSE-ST2M50-6	FUSE-ST2M50L-6
	3 mm	FUSE-ST3SMU-6	—	FUSE-ST3M62-6	FUSE-ST3M50-6	FUSE-ST3M50L-6

\* AFL NO. is for one pack of 6 pieces

\*\* Laser Optimized MM Fiber (LOMMF) compatible with OM3 and OM4 fibers

### Temperature Specifications

TEMPERATURE RANGE	
Operating Temperature	-40°C to +75°C



Debbi Kosakowski - National Sales Manager • [dkosakowski@specialized.net](mailto:dkosakowski@specialized.net) • 727-515-0911  
Eleanor Barszowski - NE Regional Sales Manager • [ebarszowski@specialized.net](mailto:ebarszowski@specialized.net) • 484-955-3178  
Carolyn Thompson • [carolyn@specialized.net](mailto:carolyn@specialized.net) • 800-794-1500