


NPC+ (No Polish Connector) NPC+ SC/OM3/4/250/ 900

CORNING


Part Number:

[NPCP-SC-OM34-48](#)

The NPC+ (No Polish Connector) eliminates field polishing, loose parts, and termination tools. The innovative buffer clamp design eliminates rework by delivering superior twist and transmission with applied load (TWAL) mechanical performance. After fiber preparation and cleaving, installation is a simple three-step process: insert fiber, actuate splice, activate the buffer clamp. Faster than fusion splicing, the NPC+ delivers savings in installation expense and reduces overall complexity of termination.

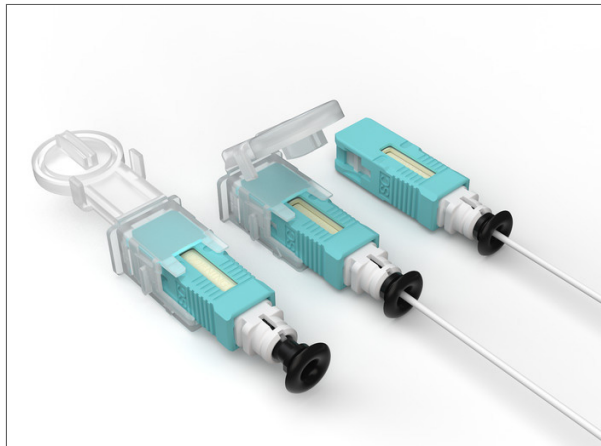

NPC+ (No Polish Connector) SC OM3/4, 250/900 μm including one semi-tight buffer clamp

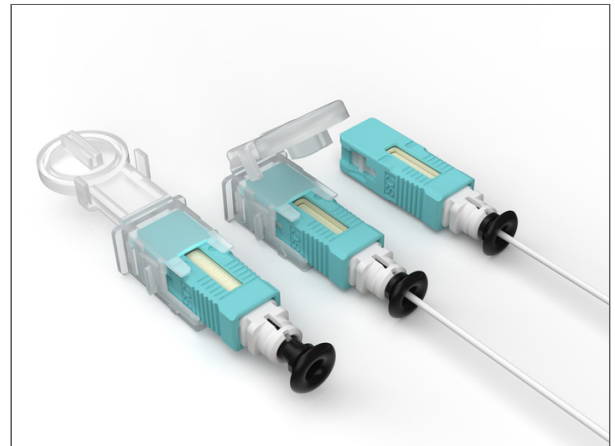

NPC+ (No Polish Connector) SC OM3/4, 250/900 μm including one semi-tight buffer clamp

NPC+ (No Polish Connector) NPC+ SC/OM3/4/250/900



Specifications

General Specifications

Fiber Category	50 μ m MM (OM3/OM4)
Product Type	Field-Installable Connectors
Technology	No-Epoxy/No-Polish

Standards

RoHS	Free of hazardous substances according to RoHS 2011/65/EU
Approvals and Listings	In compliance with environmental and mechanical requirements of TIA/ EIA-568-D.3, GR-1081, Issue 1 section 4.3 yield, Insertion loss requirements of GR-1081-CORE, Issue 1 (GR-326-CORE, Issue 4) Thermal Cycle and Thermal Age; Back reflection performance was typical of an index gel-matched mechanical splice connector

Environmental Conditions

Temperature Range, Operation	-10 °C to 60 °C (14 °F to 140 °F)
Temperature Range, Storage	-40 °C to 85 °C (-40 °F to 185 °F)

Design - Connector

Connector Type	SC
Housing Color	Aqua

Mechanical Specifications Connector

Durability	\leq 0.2 dB change, 500 rematings, FOTP-21
------------	--

Optical Specifications Connector

Insertion Loss, Max.	0.5 dB
----------------------	--------

NPC+ (No Polish Connector) NPC+ SC/OM3/4/250/900

CORNING

Optical Specifications Connector

Reflectance	< -30 dB
Insertion Loss, Typical	0.2 dB
Reflectance, Typical	< -30 dB

Ordering Information

Product Number	NPCP-SC-OM34-48
Weight	545 g
Package Contents	"48 piece box (6 connectors packaged in plastic thermoformed containers, 8 containers per box). Minimum Order Quantity: 48 PCE"
Shipping Weight	545 g
Units per Delivery	48/1



www.specialized.net

Debbi Kosakowski - National Sales Manager • dkosakowski@specialized.net • 727-515-0911
Eleanor Barszowski - NE Regional Sales Manager • ebarszowski@specialized.net • 484-955-3178
Carolyn Thompson - CSR Midwest/NE • carolyn@specialized.net • 813-295-9889
Becca Bowman - CSR NE/Western • bbowman@specialized.net • 727-412-1591