


SP-100 24V PulseTech Battery Solar Pulse Charger, 100-Watt Part #: 906X156 NSN: Pending

Description:

The PulseTech® SP-100 24V Solar Pulse Charger (100.28 Watt, 3.03A) with the PT20 Solar Charge Controller will charge and desulfate all 24-volt battery systems ensuring maximum battery performance. It works with any lead-acid batteries (VRLA, AGM, flooded cell and gel) increasing the battery's ability to maintain charge and accept re-charge,

and extending battery life. The 20A solar pulse charge controller features the advanced pulse width modulated (PWM) technology, temperature compensation and advanced pre-programmed multi-staged charging algorithms. With 12V and 24V auto-switching, the unit automatically controls the solar charging power and protects batteries.

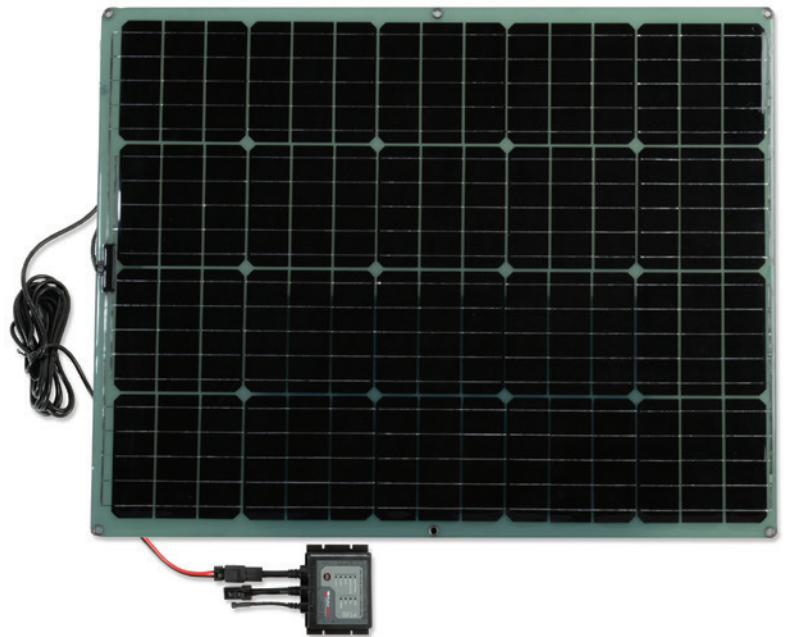

The SP-100 24V solar kit includes a solar panel (34" x 27" x 0.50"), solar pulse charge controller with a temperature sensor (9.5'), fused battery harness (9.8') and solar input adapter, plus 3" black thin-wall heat shrink tubing (3/8" diameter).

Specifications:

Input Electrical	
Solar Panel	100.28 Watt
Output Electrical	
Max Charging DC Voltage	24V
Max Charging Current	3.03 Amp
Mechanical/Physical Characteristics	
Solar Panel Dimensions	34" L x 27" W x 0.5" H
PT20 Wire/Descriptions	
Solar Panel to Controller Input Wire	5.2m or 15'
12 AWG Battery to Controller Power Feed Wire with 25A Fuse	3m or 9'10"
12 AWG ATP Plug with Butt Splice Wire	15.2cm or 6"
Battery Temperature Sensor Wire	2.9m or 9.5'
Environmental	
Operating Temperature	-31°F to 149°F (-35°C to 65°C)
Storage Temperature	0°F to 150°F (-18°C to 66°C)
Protection Category	IP66

PT20 Indicators	
Solar Status	Green light: solar is present and >15V Off: solar is <15V
Battery Status	Solid Green: float/fully charged Fast Blinking Green (6x per sec.): absorption Solid Orange: bulk charging Solid Red: soft charging Blinking Red: battery error Off: no battery connected
Pulse	Blinking Red: PulseTech Pulsing Technology is working Off: Pulsing is off
12 Volt	Solid Green: system voltage is 12V Off: system voltage is 24V
24 Volt	Solid Green: system voltage is 24V Off: system voltage is 12V
Battery Type	Solid Green light: battery type listed is the active profile Off: another battery type is set as the active profile