


TYPES YAV-2TC, YA-2LN, YA-L-2TC-

HYLUG™

Uninsulated Copper Compression Terminal
UL Listed 90° C, Up to 35 kV ♦

45° and 90° angles available. Please contact Customer Service to order:
1-800-346-4175

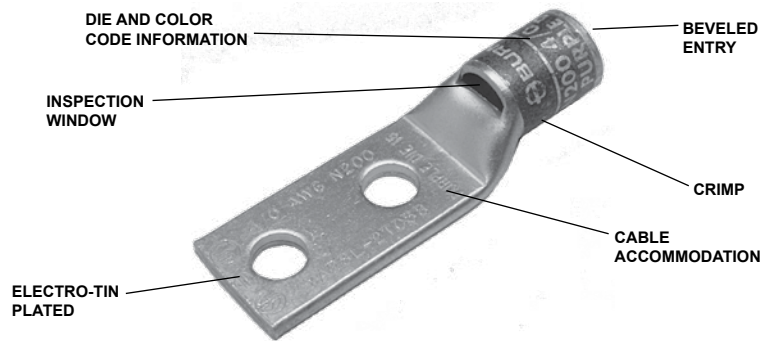

Features & Benefits

- Inspection window allows for visual verification that the wire has been fully inserted prior to crimping the lug
- Barrel is designed with an internal chamfer at the wire entry to ensure smooth insertion of the wire, preventing possible damaging of the strands
- Short/Standard length barrel is recommended for installations with limited space requirements
- Two hole tongue/tang is recommended when space permits as the 2-hole feature minimizes the terminations from loosening or rotating under vibration, movement, or heat cycling
- 45° and 90° angular lugs are available; please contact Customer Service
- Electro-tin plated unless otherwise specified to reduce galvanic corrosion (bimetallic) and resist corrosive elements
- Connectors are clearly marked with stamping and barrel color coding
- BURNDY certifies its products using the BURNDY Engineered System and select other crimp tool manufacturers in accordance with one or more of the UL categories in order to obtain a UL Listing
- Terminals and splices accommodating code wire: Accommodates Code Class B (Concentric, Compressed, Compact) and Class C wire



NOTE: Field bending straight lugs to achieve an angular connection will void UL Listing / CSA Certifications and BURNDY will not be liable for the connection.

Accessories

- Hardware - Section F
- PENETROX™ Oxide Inhibitor - Section F
- Heat and Cold Shrink Tubing - Section D
- WIREMIKE™ Wire Micrometer - Section F
- Wire Management (Cable Ties) - Section G


Straight



45°






90°



Compression Connections

Copper Compression — Code — Two Hole
Standard Barrel — with Inspection Window

TYPES YAV-2TC, YA-2LN, YA-L-2TC- (Continued)



NOTE: Field bending straight lugs to achieve an angular connection will void UL Listing / CSA Certifications and BURNDY will not be liable for the connection.

Catalog Number	Conductor		Stud Hole Size	Stud Hole Spacing	Tongue Width	Figure Dimensions			Installation Tooling						Wire Strip Length
	AWG	MM ² ***				(B)	(T)	(L)	Dieless (# of crimps)	MD6, OUR840, MD734R	500 Series	35, 750, 46* Series	Color Code	Die Index	
YAV102TC10	#14-10 Str. #12-10 Sol.	5.26 6	#10	5/8"	0.36	0.38	0.06	1.72	MR20 (1) Y8MRB1 (1) Y122CMR (1)	—	—	—	—	—	7/16
YAV102TC10E2			#10	3/4"	0.36	0.38	0.06	1.84							
YAV102TC14			1/4	5/8"	0.41	0.38	0.05	1.84							
YAV102TC14E1			1/4	1"	0.41	0.38	0.05	2.22							
YAV102TC14E2			1/4	3/4"	0.41	0.38	0.05	1.97							
YAV102TC38	#8 AWG #8 Flex G,H,I,K,M DLO	8.37 † 10	3/8	1"	0.56	0.38	0.04	2.40	Y122CMR (1) Y1MRTC (1) Y8MRB1 (1) MY29 Series (1) MRC840 (1) 81K Series (1)	W8CVT (1) W8CRT (1) X8CRT (1)	W8CVT (1) W8CRT (1) X8CRT (1)	U8CRT (1)	Red	49	7/16
YA8CL2TC10			#10	5/8"	0.41	0.44	0.08	1.83							
YA8CL2TC10E2			#10	3/4"	0.41	0.44	0.08	1.95							
YA8CL2TC14			1/4	5/8"	0.44	0.44	0.08	1.95							
YA8CL2TC14E2			1/4	3/4"	0.44	0.44	0.08	2.08							
YA8CL2TC14E1	6 AWG Sol/Str	13.3	1/4	1"	0.44	0.44	0.08	2.33							
YA8CL2TC38			3/8	1"	0.58	0.44	0.06	2.52							
YA8C2LN			1/2	1-3/4"	0.83	0.44	0.12	3.75							
YA6C2L51			#10	1/2"	0.42	0.54	0.09	1.79		W5CVT (1) W5CRT (1) X5CRT (1) X8CART (1)	W5CVT (1) W5CRT (1) X5CRT (1) X8CART (1)	U5CRT (1) U8CABT (1)	Blue	7 or 374	5/8
YA6CL2TC10			#10	5/8"	0.42	0.54	0.09	1.94							
YA6C2L52			1/4	1/2"	0.45	0.54	0.08	1.88							
YA6CL2TC14E			1/4	1/2"	0.45	0.54	0.08	1.94							
YA6C2L			1/4	5/8"	0.45	0.54	0.08	2.01							
YA6CL2TC14			1/4	5/8"	0.45	0.54	0.08	2.07							
YA6CL2TC14E2			1/4	3/4"	0.45	0.54	0.08	2.19							
YA6CL2TC14E1			1/4	1"	0.45	0.54	0.08	2.44							
YA6CL2TC516E2			5/16	3/4"	0.52	0.54	0.07	2.53							
YA6CL2TC516			5/16	1"	0.52	0.54	0.07	2.78							
YA6CL2TC38			3/8	1"	0.58	0.54	0.06	2.63							
YA6C2LN			1/2	1-3/4"	0.83	0.54	0.12	4.10							
YA5C2L	5 AWG	—	1/4	5/8"	0.44	0.81	0.07	2.28	Y122CMR (1) Y1MRTC (1) MY29 Series (1) MRC840 (1) 81K Series (1)	W5CVT (1) W5CRT (1) X5CRT (1) X8CART (1)	W5CVT (1) W5CRT (1) X5CRT (1) X8CART (1)	U5CRT (1) U8CABT (1)	Blue	7 or 374	7/8
YA4C2L	4 AWG	21.2	1/4	5/8"	0.50	0.81	0.09	2.30	Y122CMR (2) Y1MRTC (2) MY29 Series (1) MRC840 (1) 644 Series (1) 444 Series (1) 81K Series (1)	W4CVT (1) W4CRT (1) X4CRT (1)	W4CVT (1) W4CRT (1) X4CRT (1)	U4CRT (1) U6CABT (1)	Gray	8 or 346	7/8
YA4CL2TC14			1/4	5/8"	0.50	0.81	0.09	2.36							
YA4CL2TC14E2			1/4	3/4"	0.50	0.81	0.09	2.49							
YA4CL2TC14E1			1/4	1"	0.50	0.81	0.09	2.74							
YA4CL2TC516			5/16	1"	0.52	0.81	0.09	2.80							
YA4CL2TC38			3/8	1"	0.58	0.81	0.08	2.96							
YA4C2LN			1/2	1-3/4"	0.83	0.81	0.12	4.14							

-- Color code not assigned

* Use PUADP1 adapter with U dies in 46 Series




*** The MM² conductor sizes listed are the recommendations for Class 2 conductor

▲ See tooling section of this catalog for complete tool and die listings

◆ For applications greater than 2000 volts consult cable manufacturer for voltage stress relief instructions

Note: All dimensions shown are for reference only

TYPES YAV-2TC, YA-2LN, YA-L-2TC- (Continued)



NOTE: Field bending straight lugs to achieve an angular connection will void UL Listing / CSA Certifications and BURNDY will not be liable for the connection.

Catalog Number	Conductor		Stud Hole Size	Stud Hole Spacing	Tongue Width	Figure Dimensions			Installation Tooling						Wire Strip Length
	AWG	MM ² ***				(B)	(T)	(L)	Dieless (# of crimps)	MD6, OUR840, MD734R	500 Series	35, 750, 46* Series	Color Code	Die Index	
YA3CL2TC14	3 AWG #2 Sol.	26.7 25	1/4	5/8"	0.55	0.88	0.09	2.45	Y122CMR** (2) Y1MRTC (2) MY29 Series (1) MRC840 (1) 644 Series (1) 444 Series (1) 81K Series (1)	W3CRT (1)	W3CRT (1)	U3CRT (1)	White	9	15/16
YA3C2L			5/16	5/8"	0.55	0.88	0.09	2.64							
YA3CL2TC38			3/8	1"	0.58	0.88	0.08	3.06							
YA2CL2TC14	#2 AWG	33.6 35	1/4	5/8"	0.60	0.88	0.11	2.47		W2CVT (1) W2CRT (1) X2CRT (1)	W2CVT (1) W2CRT (1) X2CRT (1)	U2CRT (1)	Brown	10	15/16
YA2CL2TC14E2			1/4	3/4"	0.60	0.88	0.11	2.60							
YA2CL2TC14E1			1/4	1"	0.60	0.88	0.11	2.85							
YA2C2L			5/16	3/4"	0.60	0.88	0.11	2.67							
YA2CL2TC516			5/16	1"	0.60	0.88	0.11	2.91							
YA2CL2TC38			3/8	1"	0.60	0.88	0.11	3.03							
YA2C2LN			1/2	1-3/4"	0.83	0.88	0.12	4.27							
YA1CL2TC14	1 AWG	42.4 50	1/4	5/8"	0.68	0.88	0.10	2.51		W1CVT (1) W1CRT-1 (1) X1CRT-1 (1)	W1CVT (1) W1CRT-1 (1) X1CRT-1 (1)	U1CRT-1 (1) U4CABT (1)	Green	11 or 375	15/16
YA1CL2TC14E2			1/4	3/4"	0.68	0.88	0.10	2.64							
YA1C2L			5/16	7/8"	0.68	0.88	0.10	2.82							
YA1CL2TC38			3/8	1"	0.68	0.88	0.10	3.07							
YA1C2LN			1/2	1-3/4"	0.83	0.88	0.12	4.32							
YA25L2TC14	1/0 AWG	53.5	1/4	5/8"	0.75	0.88	0.12	2.54	MY29 Series (1) MRC840 (2) 644 Series (1) 444 Series (1) 81K Series (1)	W25VT (2) W25RT (2) X25RT (2)	W25VT (2) W25RT (2) X25RT (2)	U25RT (1) U2CABT (1)	Pink	12 or 348	15/16
YA25L2TC14E2			1/4	3/4"	0.75	0.88	0.12	2.66							
YA25L2TC14E1			1/4	1"	0.75	0.88	0.12	2.91							
YA252L			5/16	7/8"	0.75	0.88	0.12	2.85							
YA25L2TC38			3/8	1"	0.75	0.88	0.12	3.10							
YA252LN			1/2	1-3/4"	0.83	0.88	0.11	4.29							
YA26L2TC14	2/0 AWG	67.4 70	1/4	5/8"	0.83	0.94	0.12	2.64		W26VT (2) W26RT (2) X26RT (2)	W26VT (2) W26RT (2) X26RT (2)	U26RT (1)	Black	13	1
YA26L2TC14E2			1/4	3/4"	0.83	0.94	0.12	2.76							
YA26L2TC14E1			1/4	1"	0.83	0.94	0.12	3.01							
YA262L			5/16	7/8"	0.83	0.94	0.12	2.95							
YA26L2TC38			3/8	1"	0.83	0.94	0.12	3.20							
YA262LN	3/0 AWG	85	1/2	1-3/4"	0.83	0.94	0.12	4.39		W27VT (2) W27RT (2) X27RT (3)	W27VT (2) W27RT (2) X27RT (3)	U27RT (1)	Orange	14	1-1/16
YA27L2TC14E2			1/4	3/4"	1.00	1.00	0.12	2.86							
YA27L2TC38			3/8	1"	1.00	1.00	0.12	3.30							
YA272LN	4/0 AWG	107	1/2	1-3/4"	0.91	1.00	0.13	4.48	W28VT (2) W28RT (2) X28RT (3)	W28VT (2) W28RT (2) X28RT (3)	U28RT (1)	Purple	15	1-1/8	
YA28L2TC14E2			1/4	3/4"	1.02	0.88	0.14	2.78							
YA28L2TC14E1			1/4	1"	1.02	0.88	0.14	3.03							
YA28L2NTC516			5/16	1-3/4"	1.02	0.88	0.14	3.84							
YA28L2TC38E2			3/8	3/4"	1.02	0.88	0.14	2.97							
YA28L2TC38			3/8	1"	1.02	0.88	0.14	3.22							
YA282LN			1/2	1-3/4"	1.02	0.88	0.14	4.41							
YA29L2TC38	250 kcmil	127	3/8	1.00"	1.10	1.06	0.16	3.43	MY29 Series (1) 644 Series (1) 444 Series (1) 81K Series (1)	W29VT (2) X29RT (4)	W29VT (2) W29RT (2) X29RT (4)	U29RT (1)	Yellow	16	1-1/8
YA292LN			1/2	1-3/4"	1.10	1.06	0.16	4.62							

-- Color code not assigned

* Use PUADP1 adapter with U dies in 46 Series

*** The MM² conductor sizes listed are the recommendations for Class 2 conductor

▲ See tooling section of this catalog for complete tool and die listings




◆ For applications greater than 2000 volts consult cable manufacturer for voltage stress relief instructions

Note: All dimensions shown are for reference only

Compression Connections

Copper Compression — Code — Two Hole
Standard Barrel — with Inspection Window

TYPES YAV-2TC, YA-2LN, YA-L-2TC- (Continued)



NOTE: Field bending straight lugs to achieve an angular connection will void UL Listing / CSA Certifications and BURNDY will not be liable for the connection.

Catalog Number	Conductor		Stud Hole Size	Stud Hole Spacing	Tongue Width	Figure Dimensions			Installation Tooling							Wire Strip Length
	AWG	MM ² ***				(B)	(T)	(L)	Dieless (# of crimps)	MD6, OUR840, MD734R	500 Series	35, 750, 46* Series	Color Code	Die Index		
YA30L2TC38	300 kcmil	152	3/8	1"	1.20	1.03	0.16	3.45	644 Series (1) 444 Series (1) 81K Series (1)	W30VT (2)	W30VT (2) W30RT (2)	U30RT (2) U28ART (2)	White	17 or 298	1	
YA302LN		150	1/2	1-3/4"	1.20	1.03	0.16	4.63								
YA31L2TC14E2	350 kcmil	177 185	1/4	3/4"	1.29	1.06	0.18	3.07		W31VT (2)	W31VT (2) W31RT (2)	U31RT (2) U29ART (2)	Red	18 or 324	1-1/8	
YA31L2NTC516			5/16	1-3/4"	1.29	1.06	0.18	4.13								
YA31L2TC38			3/8	1"	1.29	1.06	0.18	3.51								
YA31L2TC12			1/2	1-1/4"	1.29	1.06	0.18	4.01								
YA312LN	400 kcmil	203	1/2	1-3/4"	1.29	1.06	0.18	4.70		W32VT (2)	W32VT (2) W32RT (2)	U32RT (2) U30ART (2)	Blue	19 or 470	1-1/4	
YA322L			3/8	1"	1.40	1.19	0.19	3.75								
YA32L2TC38			3/8	1"	1.40	1.19	0.19	3.69								
YA32L2TC38E5			3/8	1-1/16"	1.40	1.19	0.19	3.75								
YA322LN			1/2	1-3/4"	1.40	1.19	0.19	4.88								
YA34L2TC14E2	500 kcmil	253 240	1/4	3/4"	1.55	1.27	0.23	3.44	644 Series (1) 444 Series (1) 81K Series (1)	W34VT (2)	W34VT (2) W34RT (2)	U34RT (2) U31ART (2)	Brown	20 or 299	1-7/16	
YA342L			3/8	1"	1.55	1.27	0.23	3.94								
YA34L2TC38			3/8	1"	1.55	1.27	0.23	3.88								
YA34L2TC12			1/2	1-1/4"	1.55	1.27	0.23	4.38								
YA342LN			1/2	1-3/4"	1.55	1.27	0.23	5.06								
YA352L	550 kcmil	—	3/8	1-1/8"	1.65	1.69	0.25	4.64		—	—	U35RT (2)	Yellow	21	1-3/4	
YA352LN			1/2	1-3/4"	1.65	1.69	0.25	5.51								
YA36L2TC38	600 kcmil	304 300	3/8	1"	1.74	1.38	0.27	4.23		—	—	U36RT (2) U32ART (2)	Green	22 or 472	1-3/4	
YA362LN			1/2	1-3/4"	1.74	1.38	0.27	5.23								
YA372L	650 kcmil	—	3/8	1-1/8"	1.80	1.39	0.27	4.40		644 Series (1) 444 Series (1) 81K Series (1)	—	—	U37RT (2)	Orange	23	1-15/16
YA372LN			1/2	1-3/4"	1.80	1.39	0.27	5.27								
YA38L2TC38	700 kcmil	355	3/8	1"	1.84	1.45	0.27	4.35	—		—	U38RT (2)	Pink	400	1-15/16	
YA382L			3/8	1-1/8"	1.84	1.45	0.27	4.48								
YA38L2TC12			1/2	1-1/2"	1.84	1.45	0.27	4.67								
YA382LN			1/2	1-3/4"	1.84	1.45	0.27	5.35								
YA39L2TC38	750 kcmil	380	3/8	1"	1.91	1.42	0.27	4.36	644 Series (1) 444 Series (1) 81K Series (2)		—	—	U39RT (2) P39RT (2)	Black	24	1-15/16
YA392L			3/8	1-1/8"	1.91	1.42	0.27	4.48								
YA39L2TC12E3			1/2	1-1/2"	1.91	1.42	0.27	4.92								
YA392LN			1/2	1-3/4"	1.91	1.42	0.27	5.36								
YA39L2TC58			5/8	1-1/2"	1.91	1.42	0.27	5.17								
YA40L2TC38	800 kcmil	405 400	3/8	1"	1.98	1.42	0.30	4.37		—	—	P40RT (3)	Orange	25	1-15/16	
YA402L			3/8	1-1/8"	1.98	1.42	0.30	4.50								
YA402LN			1/2	1-3/4"	1.98	1.42	0.30	5.38								
YA412L	850 kcmil	—	3/8	1-1/8"	2.01	1.88	0.31	4.97		—	—	P41D (1)** P44PR	Gold	26	1-15/16	
YA442L	1000 kcmil	507 500	1/2	1-1/4"	2.19	1.65	0.33	5.24		—	—	P44RT (3)	White	27	1-15/16	
YA44L2TC12			1/2	1-1/4"	2.19	1.65	0.33	5.05								
YA442LN			1/2	1-3/4"	2.19	1.65	0.33	5.74								

-- Color code not assigned

* Use PUADP1 adapter with U dies in 46 Series

*** The MM² conductor sizes listed are the recommendations for Class 2 conductor

▲ See tooling section of this catalog for complete tool and die listings

◆ For applications greater than 2000 volts consult cable manufacturer for voltage stress relief instructions

Note: All dimensions shown are for reference only