

Vinyl Cloth Adhesive Wire & Cable Labels (B-498)

Printer automatically repeats your text to fill the label for maximum readability. Repositionable vinyl cloth material's special adhesive stays put, but marker can be removed and reapplied if necessary. Temperature range: -40°F to 175°F (-40°C to 70°C). UL Recognized.




Figure 29



Fits Printer Models	Diagram	Catalog #	B#	Material	Color	Approx. Wire Gauge*	Max. Wire Dia. Inch (mm)	Label Width A Inch (mm)	Label Height B Inch (mm)	Labels/ Roll
BMP41, 51, 53	Fig. 29	M-7-498	B-498	Vinyl	BK on WT	22 - 16 Gauge	0.110 (2.8)	0.500 (12.7)	0.500 (12.7)	240
BMP41, 51, 53	Fig. 29	M-11-498	B-498	Vinyl	BK on WT	16 - 10 Gauge	0.160 (4.1)	0.750 (19.1)	0.500 (12.7)	220
BMP41, 51, 53	Fig. 29	M-48-498	B-498	Vinyl	BK on WT	12 - 10 Gauge	0.210 (5.3)	1.000 (25.4)	0.750 (19.1)	180
BMP41, 51, 53	Fig. 29	M-49-498	B-498	Vinyl	BK on WT	12 - 10 Gauge	0.210 (5.3)	1.000 (25.4)	1.000 (25.4)	160
BMP41, 51, 53	Fig. 29	M-131-498	B-498	Vinyl	BK on WT	10 - 4 Gauge	0.270 (6.7)	1.000 (25.4)	0.500 (12.7)	180
BMP41, 51, 53	Fig. 29	M-91-498	B-498	Vinyl	BK on WT	10 - 4 Gauge	0.270 (6.7)	1.500 (38.1)	1.000 (25.4)	120

Inside-Panel Component Labels for Electrical & Automation (B-422, B-428, B-483, B-499 and B-595)

Variety of durable materials ideal for marking backer boards, DIN rail, relays, PLCs, switches and solenoids. Create serial or rating plates with barcodes, graphics and more with a flexible high-tack adhesive for easy and long-lasting adhesion.

B-422 Polyester Material - Permanent adhesive, good for powder-coated/textured surfaces. Best on flat surfaces. Temperature Range: -40°F to 212°F (-40°C to 100°C). UL recognized.

B-428 Metalized Polyester Material - Permanent adhesive, silver finish. Temperature Range: -40°F to 176°F (-40°C to 80°C). UL recognized.

B-483 Polyester Material - Permanent adhesive for powder-coated/textured surfaces. Best on flat surfaces. Temperature Range: -40°F to 248°F (-40°C to 120°C). UL recognized.

B-499 Nylon Cloth Material - Permanent adhesive. Pliable for rough or smooth surfaces. Temperature Range: -94°F to 194°F (-70°C to 90°C). UL recognized.

B-595 Indoor/Outdoor Vinyl Material - Permanent adhesive, very pliable, good for rough surfaces and outdoor use, wide range of colors. Temperature Range: -40°F to 180°F (-40°C to 82 °C). UL recognized.


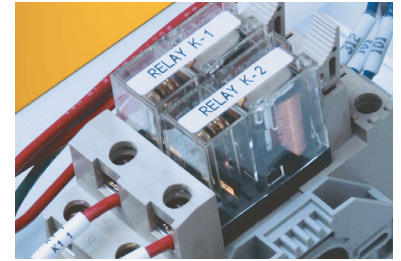


Figure 29




Figure 33

Fits Printer Models	Diagram	Catalog #	B#	Material	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Labels/Roll
B-422 – Polyester Material								
BMP41, 51, 53	Fig. 33	MC-375-422	B-422	Polyester	BK on WT	0.375 (9.5)	25 ft (7.6 m)	1 roll (cont.)
BMP41, 51, 53	Fig. 33	MC-475-422	B-422	Polyester	BK on WT	0.475 (12.1)	25 ft (7.6 m)	1 roll (cont.)
BMP41, 51, 53	Fig. 29	M-7-422	B-422	Polyester	BK on WT	0.500 (12.7)	0.500 (12.7)	280
BMP41, 51, 53	Fig. 33	MC-500-422	B-422	Polyester	BK on WT	0.500 (12.7)	25 ft (7.6 m)	1 roll (cont.)
BMP41, 51, 53	Fig. 33	MC-625-422	B-422	Polyester	BK on WT	0.625 (15.8)	25 ft (7.6 m)	1 roll (cont.)
BMP41, 51, 53	Fig. 29	M-47-422	B-422	Polyester	BK on WT	1.000 (25.4)	0.500 (12.7)	480
BMP41, 51, 53	Fig. 29	M-49-422	B-422	Polyester	BK on WT	1.000 (25.4)	1.000 (25.4)	260
BMP41, 51, 53	Fig. 33	MC1-1000-422	B-422	Polyester	BK on WT	1.000 (25.4)	25 ft (7.6 m)	1 roll (cont.)
BMP41, 51, 53	Fig. 29	M-89-422	B-422	Polyester	BK on WT	1.500 (38.1)	0.500 (12.7)	180
BMP41, 51, 53	Fig. 29	M-90-422	B-422	Polyester	BK on WT	1.500 (38.1)	0.750 (19.1)	180
B-428 – Metalized Polyester Material								
BMP41, 51, 53	Fig. 29	M-47-428	B-422	Polyester	BK on SV	1.000 (25.4)	0.500 (12.7)	480
BMP41, 51, 53	Fig. 29	M-92-428-BB	B-422	Polyester	BK on SV	1.130 (28.7)	0.500 (12.7)	239
BMP41, 51, 53	Fig. 29	M-60-428	B-422	Polyester	BK on SV	2.000 (50.8)	1.000 (25.4)	140
B-483 – Ultra Aggressive Adhesive Polyester								
BMP41, 51, 53	Fig. 29	M-60-483	B-422	Polyester	BK on WT	2.000 (50.8)	1.000 (25.4)	140
B-499 – Nylon Cloth Material								
BMP41, 51, 53	Fig. 33	MC-375-499	B-499	Nylon Cloth	BK on WT	0.375 (9.5)	16 ft (4.9 m)	1 roll (cont.)
BMP41, 51, 53	Fig. 33	MC-500-499	B-499	Nylon Cloth	BK on WT	0.500 (12.7)	16 ft (4.9 m)	1 roll (cont.)
BMP41, 51, 53	Fig. 33	M-11-499	B-499	Nylon Cloth	BK on WT	0.750 (19.1)	0.500 (12.7)	1 roll (cont.)
BMP41, 51, 53	Fig. 33	MC-750-499	B-499	Nylon Cloth	BK on WT	0.750 (19.1)	16 ft (4.9 m)	1 roll (cont.)
BMP41, 51, 53	Fig. 33	M-130-499	B-499	Nylon Cloth	BK on WT	0.825 (20.9)	0.375 (9.5)	1 roll (cont.)
BMP41, 51, 53	Fig. 33	M-84-499	B-499	Nylon Cloth	BK on WT	0.900 (22.8)	0.500 (12.7)	1 roll (cont.)
BMP41, 51, 53	Fig. 33	M-131-499	B-499	Nylon Cloth	BK on WT	1.000 (25.4)	0.500 (12.7)	1 roll (cont.)
BMP41, 51, 53	Fig. 33	M-128-499	B-499	Nylon Cloth	BK on WT	1.000 (25.4)	1.900 (48.3)	1 roll (cont.)
B-595 – Indoor/Outdoor Vinyl Material								
BMP41, 51, 53	Fig. 33	MC-500-595-OR-BK	B-595	Vinyl	BK on OR*	0.500 (12.7)	25 ft (7.6 m)	1 roll (cont.)
BMP41, 51, 53	Fig. 33	MC-750-595-OR-BK	B-595	Vinyl	BK on OR*	0.750 (19.1)	25 ft (7.6 m)	1 roll (cont.)
BMP41, 51, 53	Fig. 33	MC1-1000-595-OR-BK	B-595	Vinyl	BK on OR*	1.000 (25.4)	25 ft (7.6 m)	1 roll (cont.)

* For additional general purpose tapes in a variety of colors, refer to the Indoor/Outdoor Grade Facility and Safety Labels.