

MT-8006B Data Diver



LCD display, Talk/Monitor, Polarity indication, Power saving, Hands-Free

Features:

- LCD display for dialing number, Caller ID, Clock and other information
- Indicator for determining the line service
- Smart power saving enables battery life up to 6 months
- 12 phone number memory for speed dialing
- 16 dialing number memories
- Tone (DTMF) and pulse operation
- Up to 32 digits phone number memory for speed dialing key
- Pre-dialing and last number redial function
- PBX pause key, insert a PBX pause in stored numbers
- Telephone line polarity indicators
- Low battery indication
- Backlight function
- RJ-11 port for easy test leads change
- Ringer and voltage LED indication
- Angled bed of nails and RJ-11 plug

Electrical	
Loop limit	2 KΩ maximum at 48 Vdc (nominal 20 mA minimum loop current)
DC resistance	
Talk mode	300Ω typical
Monitor impedance	>39kΩ nominal at 1 KHz
Rotary dial output	
Pulsing rate	10pps±0.8pps
Percent break	60/40%±2%
Inter digit interval	1000 ms typical
Leakage during break	>130 KΩ
DTMF output	
Tone frequency error	±1.5% maximum
Tone level	-8±2dBm combined (typical)
High versus low tone difference	4 dB maximum
Memory dialing	
Memory capacity	12 memories
Digit capacity	16 digits per memory
PBX pause duration	1-3.6 seconds
Fuse	250V, 250mA
Power source	4pcs 1.5V AAA batteries (not included)
Physical (Hook included)	
Measurement	218.5 × 69.5 × 49mm (8.6" × 2.7" × 1.9")
Weight	208g typical

Individual packing: Double blister



MT-8006VA 3-1/2 Auto Range DCV/DCA Meter

Free with purchase of MT-8006B



Accessories: Angled bed of nails & headset



Telephone line testing



High impedance monitor


400-028 Dual Telephone Line Tester



Features:

This tool is for testing the condition of dual telephone line jacks. Multi-color LED indicator light alerts to okay line, reversed line, AC Voltage present and dead line. Fits in shirt pocket.

- Dual telephone line tester that troubleshoots common problem conditions with standard single or dual-line telephone hook-ups.
- Compact unit easily plugs into any single or dual-line telephone jack.
- Tests for three wiring conditions: correct, reversed and AC voltage presence.

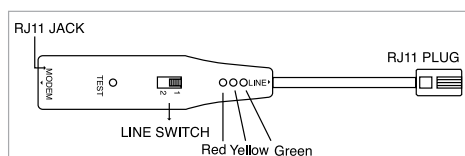

Individual packing: Blister card

902-267 / 902-459

Replacement Test Leads for Butt Set



Features:

- Professional grade "Bed of Nails" insulation piercing clips within the jaws
- Ultra-durable nylon braided jacket
- Guarantee ruggedness and flexibility
- Non-insulated ring terminals

Individual packing: Blister card



902-267



902-459

Model No.	Material	Butt set	Length	Color
902-267	Nylon/copper	400-042	60 inch	Red
902-459		MT-8006B	50 inch	Black