


Compression Connectors for Copper Conductor

Two-Hole Lugs — Standard Barrel 600V to 35kV (continued)

Material: High-Conductivity
Wrought Copper

Finish: Electro Tin Plate

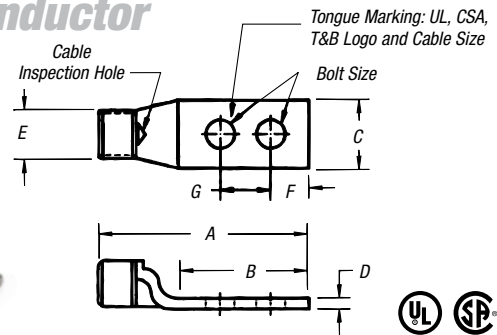

CAT. NO.	WIRE SIZE			BOLT SIZE	DIMENSIONS (IN.)							DIE CODE	DIE COLOR
	CODE	FLEX CLASS G, H, I, K, M†			A	B	C	D	E	F	G		
54212	4/0 AWG	200 Navy		3/8	3.18	1.93	1.03	.14	.70	3/8	1	54	PURPLE
54270		3/0 Weld		1/2	4.25	3.00	1.03	.14	.70	1/2	1 1/4	54	
256-30695-1247		450/24 = 182 kcmil		1/4	3.06	1.44	1.03	.16	.70	3/8	3/4	54	
256-30695-331		703/.0154		1/4	3.06	1.81	1.03	.14	.70	3/8	3/4	54	
256-30695-1261				5/16	3.18	1.93	1.03	.14	.70	3/8	1	54	
54213	250 kcmil	250 Navy		3/8	3.28	1.93	1.13	.14	.77	3/8	1	62	YELLOW
54275				1/2	4.19	2.81	1.13	.18	.77	1/2	1 1/4	62	
256-30695-345		4/0 Weld		3/8	3.25	1.69	1.25	.15	.79	3/8	7/8	62	
256-30695-835		550/24 = 222 kcmil		3/8	4.25	2.80	1.25	.15	.79	3/8	1	62	
256-30695-452		133/.0399		3/8	3.13	1.88	1.25	.16	.79	3/8	7/8	62	
58265	300 kcmil	259/.0286, 637/.018		1/2	3.94	2.81	.94	.14	.79	1/2	1 1/4	62	WHITE
54214		300 Navy		3/8	3.45	1.93	1.25	.15	.85	3/8	1	66	
54280		262, 650/24, 250 Weld		1/2	4.45	3.00	1.25	.15	.85	1/2	1 1/4	66	
256-30695-332				1/4	3.40	1.81	1.36	.18	.93	3/8	3/4	71	
256-30695-1240		350 Navy		5/16	4.18	2.63	1.36	.18	.93	3/8	1 1/4	71	
54215	350 kcmil			3/8	3.51	1.93	1.36	.18	.93	3/8	1	71	RED
54282				1/2	4.60	3.00	1.36	.18	.93	1/2	1 1/4	71	
54216		400 Navy		3/8	3.93	1.93	1.41	.17	.96	3/8	1	76	
54283		313, 775/24, 300 Weld		3/8	3.88	1.93	1.41	.17	.96	3/8	1 1/16	76	
256-30695-439		400 Weld		3/8	4.35	2.25	1.61	.22	1.04	3/8	1	80	
58277	500 kcmil	925/24 = 373 kcmil		1/2	5.06	3.00	1.61	.22	1.04	1/2	1 1/4	80	N/A
256-30695-839		259/.0393, 427/.0306		3/8	4.09	2.06	1.61	.22	1.04	1/2	1	80	
54218				3/8	3.96	1.93	1.61	.22	1.10	3/8	1	87	
54286		500 Navy		1/2	5.07	3.00	1.61	.22	1.10	1/2	1 1/4	87	
256-30695-188				1/2	4.06	2.31	1.63	.22	1.10	1/2	1 1/4	87	
54220	600 kcmil	450 Flex I, K		3/8	4.13	1.93	1.75	.24	1.20	3/8	1	94	GREEN
54289		1100/24 = 444 kcmil		1/2	5.23	3.00	1.75	.24	1.20	1/2	1 1/4	94	
256-30695-1406				3/8	4.05	2.11	1.78	.24	1.25	1/2	1	99	
256-30695-842				3/8	4.30	2.06	1.80	.28	1.25	1/2	1	99	
256-30695-898				3/8	4.30	2.06	1.80	.28	1.25	1/2	1	99	
54291	700 kcmil			1/2	5.18	3.00	1.84	.23	1.25	1/2	1 1/4	99	PINK
58281		500 Flex, 535, 1325/24		1/2	5.23	3.00	1.80	.28	1.25	1/2	1 1/4	99	
256-30695-237				3/8	5.10	2.80	1.94	.27	1.33	3/8	1	106	
54223		600, 427 Str.		1/2	5.32	3.00	1.94	.27	1.33	1/2	1 1/4	106	
256-30695-1376				3/8	4.78	2.28	2.01	.27	1.38	7/16	1 1/8	107	
54224	800 kcmil	800 Navy		1/2	5.50	3.00	2.01	.27	1.38	1/2	1 1/4	107	ORANGE
256-30695-694				3/8	4.65	2.06	2.18	.31	1.50	1/2	1	115	
54226				1/2	5.59	3.00	2.18	.31	1.50	1/2	1 1/4	115	
256-30695-846		1925/24 = 777 kcmil		3/8	4.60	2.06	2.12	.31	1.50	1/2	1	115	
256-30695-844				3/8	5.00	2.63	2.18	.31	1.50	7/16	1 1/2	115	
54228	1000 kcmil	1000 Navy		1/2	5.45	3.00	2.27	.30	1.55	1/2	1 1/4	125	N/A

† Contact Technical Services for specific stranding listings