Stinger® LED HP Rechargeable Flashlight

Case Material: 6000 series machined aircraft aluminum with non-slip rubberized comfort grip

Dimensions: Length: 9.23 in. (23.44 cm) Diameter: Major Diameter: 2.20 in. (5.59 cm)

Body Diameter: 1.17 in. (2.97 cm)

Weight: 13.6 oz (385 grams)*

Lens: Unbreakable polycarbonate with scratch-resistant coating. O-ring sealed.

Light Source: C4[®]LED technology, impervious to shock with a 50,000 hour lifetime.

Light Output: High: 48,000 candela peak beam intensity;200 lumens Medium: 24,000 candela peak beam intensity;100 lumens

Low: 11,000 candela peak beam intensity; 50 lumens

Deep-dish parabolic reflector produces a long range targeting beam with optimum peripheral illumination to aid in navigation. Optimized electronics provide regulated intensity.

On/Off: Multi-function, easy access head mounted push-button switch designed for extremely long life; tested at 1 million actuations.

High: 2.00 hours to the 10% output level. Medium: 3.75 hours to the 10% output level.

Low: 7.25 hours to the 10% output level. Strobe: 5.50 hours.

Run Time:

0

3-cell, 3.6 Volt Nickel-cadmium sub-C battery is rechargeable up to 1000 times.

Ten hours to fully recharge on 100V, 120V, 230V or 240V AC, or 12V DC. 2.5-hour fast charger or PiggyBack® charger model available

 LED Charge-continuity indicator on charger base; compact, snap-in charger mounts in any position. Charging:

Serialized for positive identification.

Features: • IPX4 Rated for water resistant operation.

Most models meet applicable European Community Directives

Streamlight warrants this product to be free of defect for a lifetime of use. We will repair, replace or refund the purchase price, at our option, of any Streamlight product that does not work or that you manage to break for as long as you own it. Of course, this limited lifetime warranty excludes abuse, batteries and chargers. Rechargeable batteries and chargers have a one (1) year warranty with


proof of purchase. Approvals**:

Warranty: chase). *With battery (included in pur-

| Item | Item # | UPC |
|-------------------------------|--------|----------------|
| Steady Charge | | |
| Stinger LED HP 230V AC/12V DC | 75775 | 080926-75775-2 |
| Stinger LED HP 230V AC | 75774 | 080926-75774-5 |
| Stinger LED HP 240V AC/12V DC | 75779 | 080926-75779-0 |
| Stinger LED HP 240V AC | 75778 | 080926-75778-3 |
| Stinger LED HP 120V AC/12V DC | 75763 | 080926-75763-9 |
| Stinger LED HP 120V AC | 75761 | 080926-75761-5 |
| Stinger LED HP 100V AC/12V DC | 75758 | 080926-75758-5 |
| Stinger LED HP 100V AC | 75757 | 080926-75757-8 |
| Stinger LED HP 12V DC | 75762 | 080926-75762-2 |
| Stinger LED HP W/O Charger | 75760 | 080926-75760-8 |

| Item | Item # | UPC |
|--|--------|----------------|
| Steady Charge PiggyBack | | |
| Stinger LED HP 230V AC/12V DC | 75789 | 080926-75789-9 |
| Stinger LED HP 230V AC | 75788 | 080926-75788-2 |
| Stinger LED HP 240V AC/12V DC | 75793 | 080926-75793-6 |
| Stinger LED HP 240V AC | 75792 | 080926-75792-9 |
| Stinger LED HP 120V AC SC | 75783 | 080926-75783-7 |
| Stinger LED HP 120V AC/12V DC | 75782 | 080926-75782-0 |
| Stinger LED HP 100V AC/12V DC | 75796 | 080926-75796-7 |
| Stinger LED HP 100V AC | 75771 | 080926-75771-4 |
| Stinger LED HP 12V DC | 75784 | 080926-75784-4 |
| Stinger LED HP 240V AC/12V DC | 75795 | 080926-75795-0 |
| Stinger LED HP 100V AC/12V DC | 75797 | 080926-75797-4 |
| See reverse side for additional part numbers | | |



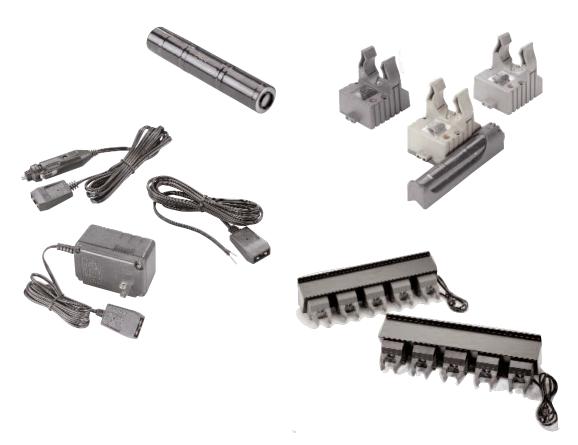

| Item | Item # | UPC | |
|-------------------------------|--------|----------------|--|
| Fast Charge | · | | |
| Stinger LED HP 230V AC | 75776 | 080926-75776-9 | |
| Stinger LED HP 230V AC/12V DC | 75777 | 080926-75777-6 | |
| Stinger LED HP 240V AC | 75780 | 080926-75780-6 | |
| Stinger LED HP 240V AC/12V DC | 75781 | 080926-75781-3 | |
| Stinger LED HP 120V AC/12V DC | 75785 | 080926-75785-1 | |
| Stinger LED HP 120V AC | 75764 | 080926-75764-6 | |
| Stinger LED HP 100V AC | 75769 | 080926-75769-1 | |
| Stinger LED HP 100V AC/12V DC | 75770 | 080926-75770-7 | |
| Stinger LED HP 12V DC | 75755 | 080926-75755-4 | |
| Fast Charge PiggyBack | | | |
| Stinger LED HP 120V AC/12V DC | 75756 | 080926-75756-1 | |
| Stinger LED HP 100V AC | 75772 | 080926-75772-1 | |
| Stinger LED HP 120V AC | 75786 | 080926-75786-8 | |
| Stinger LED HP 12V DC | 75787 | 080926-75787-5 | |
| Stinger LED HP 230V AC | 75790 | 080926-75790-5 | |
| Stinger LED HP 230V AC/12V DC | 75791 | 080926-75791-2 | |
| Stinger LED HP 240V AC | 75794 | 080926-75794-3 | |
| Stinger LED HP 240V AC/12V DC | 75795 | 080926-75795-0 | |
| Stinger LED HP 100V AC/12V DC | 75797 | 080926-75797-4 | |

| Item | Part # | UPC |
|--|--------|----------------|
| DC2 direct wire charge cord | 22050 | 080926-22050-8 |
| DC1 Charge Cord | 22051 | 080926-22051-5 |
| 120V AC charge cord | 22311 | 080926-22311-0 |
| 120V AC Fast Charge cord | 22665 | 080926-22665-4 |
| 120V AC Fast Charge cord | 22664 | 080926-22664-7 |
| 100V AC Charge cord | 22666 | 080926-22666-1 |
| 240V AC Charge cord | 22241 | 080926-22241-0 |
| Charger Holder Stinger (10 Hour) (Doesnot include cord) | 75100 | 080926-75100-2 |
| Charger Holder Fast Charge (2.5 hour) (Does not include cord) | 75103 | 080926-75103-3 |
| Battery Stick (NiCd Batteries) | 75175 | 080926-75175-0 |
| PiggyBack® Charger Holder - Steady Charger & Battery (Does not include cord) | 75275 | 080926-75275-7 |
| PiggyBack® Charger Holder Fast Charge & Battery (Does not Include cord) | 75276 | 080926-75276-4 |
| 5 Unit Bank Charger, 120V | 75400 | 080926-75400-3 |
| 5 Unit Bank Fast Charger, 120V | 75401 | 080926-75401-6 |
| 5 Unit Bank Charger, 230V | 75600 | 080926-75600-7 |
| 5 Unit Bank Fast Charger, 230V | 75601 | 080926-75601-4 |
| 5 Unit Bank Charger, 100V | 75700 | 080926-75700-4 |
| 5 unit bank charger 100V | 75701 | 080926-75701-1 |

