

Fiber Optic Jumper, 1 F, SC APC to SC APC, Tight-Buffered Cable, Riser, 2.0 mm Standard SCAPC Simplex SM / Standard SCAPC Simplex SM, SMF Ultra, 1F, Single Fiber Riser, Standard Yellow

CORNING

Part Number:
444401G2131010M

Simplex cable assemblies are offered with a variety of connector combinations. Connector options include LC, SC, FC and ST® Compatible. RoHS compliant cables with riser-rated jackets are available in 3.0 mm, 2.0 mm, 1.6 mm and 900 µm.

Additional detailed furcation images are available in the Cable Assembly Family Specification Sheet.

Many of our fiber optic cable assemblies are highly configurable. If you don't see what you are looking for here, please review the ordering matrix contained in the family spec sheet, or contact Customer Care at 1-800-743-2675.

Features and Benefits

Flame-retardant jacket

Rugged and durable

Superior Performance Testing



Every termination is tested to ensure the highest in network performance

State-Of-The-Art Manufacturing Processes

Corning proprietary manufacturing processes and advanced technology result in unsurpassed product consistency

Corning advantage

Integrated developer and manufacturer of cable, connectors and fiber to ensure overall cable assembly performance

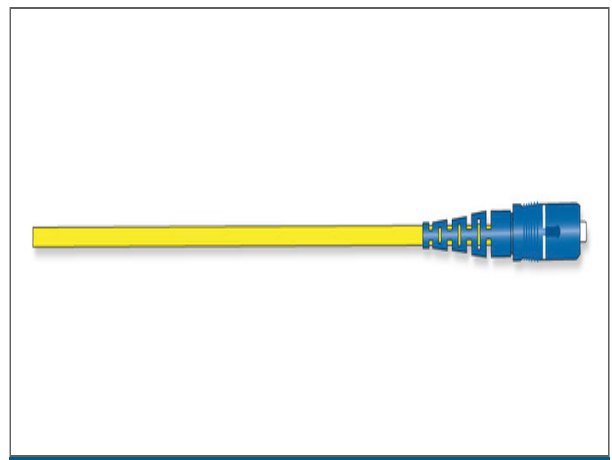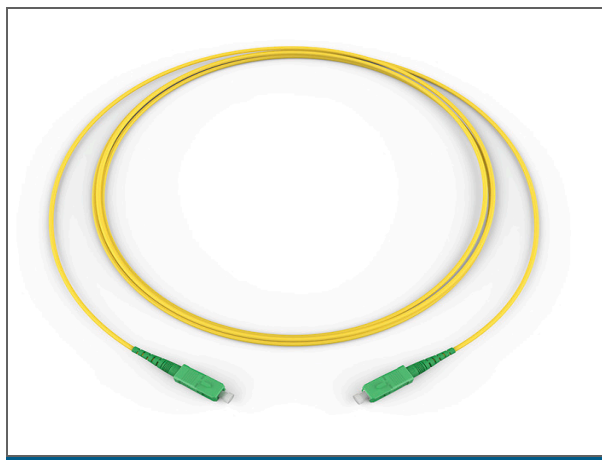

Fiber Optic Jumper, 1 F, SC APC to SC APC, Tight-Buffered Cable, Riser, 2.0 mm Standard SCAPC Simplex SM / Standard SCAPC Simplex SM, SMF Ultra, 1F, Single Fiber Riser, Standard Yellow

CORNING

Specifications

Mechanical Specifications

Nominal Outer Diameter	2 mm (0.08 in)
------------------------	----------------

Dimensions

Length	10 m (32.8 ft)
--------	----------------

Specifications - Connector B

Reflectance, Typical	≤ -65 dB
Polish	APC
Insertion Loss, Typical	0.15 dB
Boot Color	Green
Connector Type	SC APC
Ferrule Material	Ceramic
Housing Color	Green
Housing Material	Composite

Specifications - Connector A

Reflectance, Typical	≤ -65 dB
Polish	APC
Insertion Loss, Typical	0.15 dB
Boot Color	Green
Connector Type	SC APC
Ferrule Material	Ceramic
Housing Color	Green
Housing Material	Composite

Fiber Optic Jumper, 1 F, SC APC to SC APC, Tight-Buffered Cable, Riser, 2.0 mm Standard SCAPC Simplex SM / Standard SCAPC Simplex SM, SMF Ultra, 1F, Single Fiber Riser, Standard Yellow

CORNING

General Specifications

Application	Vertical Riser , General Building Applications
Cable Type	Tight-Buffered
Flame Rating	Riser (OFNR)
Cable Assembly Type	Single fiber

Design

Fiber Count	1
Outer Jacket Color	Yellow

Standards

RoHS	Free of hazardous substances according to RoHS 2011/65/EU
------	---

Optical Characteristics

Fiber Code	G
Fiber Type	Single-Mode Ultra-Bendable Fiber
Fiber Compliance	ITU-T G.652.D and ITU-T G.657.A1
Fiber Core Diameter	8.2 μ m
Maximum Attenuation	0.4 dB/km / 0.4 dB/km / 0.3 dB/km
Serial 1 Gigabit Ethernet	5000 MHz*km / - / -
Serial 10 Gigabit Ethernet	10000 MHz*km / - / 40000 MHz*km
Wavelengths	1310 nm / 1383 nm / 1550 nm
Fiber Category	OS2