# **BURNDY®** Products

## **Tooling**


## TYPES RCC556, RCC600, RCC750HD, RCC954ACSR, RCC1000

#### **RATCHET CABLE CUTTERS**

The RCC series cable cutters are precision high quality tools designed to cut up to 954 ACSR and 1000 kcmil copper and aluminum. The tools are equipped with rugged steel blades, and a precision bidirectional ratchet mechanism for positive blade control, including where applicable, a fast action thumb slide collar for rapid blade advance and rugged fiberglass or non-slip grip handles. RCC600 and RCC750HD have cushion grip covered steel handles.

The RCC series cable cutters are warranted to be free from defects in material (excluding blades) and workmanship for one year.

For replacement blades, consult factory for details.

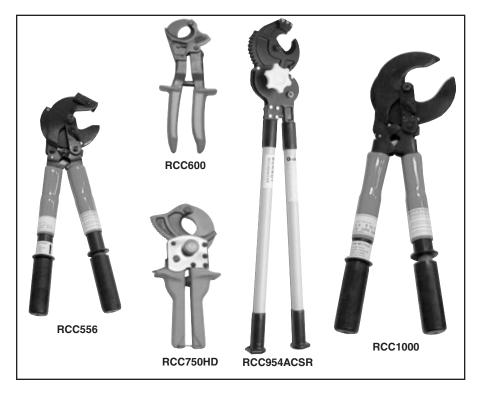


### **FEATURES**

- · Patented high strength steel blades.
- Quick release, bi-directional ratchet mechanism.
- · Rapid blade advance.

#### **BENEFITS**

- Easy cutting with minimal cable distortion.
- Excellent cutting edge performance.
- Provides comfortable tool operation and long life.

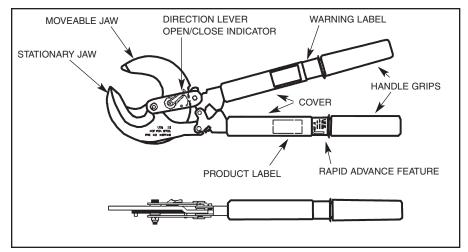

| Catalog    | Overall  | Max. Capacity |            |           | Max.<br>Insulation |           |
|------------|----------|---------------|------------|-----------|--------------------|-----------|
| Number     | Length   | Copper        | Aluminum   | ACSR      | Diameter           | Weight    |
| RCC556     | 21"      | 500 kcmil     | 500 kcmil  | 556 kcmil | 1.25"              | 3.5 lbs.  |
|            | [533 mm] | [32 mm]       | [32 mm]    |           | [32 mm]            | (1.5 kg)  |
| RCC600     | 10"      | 600 kcmil     | 600 kcmil  | _         | 1.25"              | 1.27 lbs. |
|            | [255 mm] | [300 mm]      | [300 mm]   |           | [32 mm]            | (.57 kg)  |
| RCC750HD   | 10-1/2"  | 750 kcmil     | 750 kcmil  | _         | 1.62"              | 2.43 lbs. |
|            | [267 mm] | [500 mm]      | [500 mm]   |           | [42 mm]            | (1.1 kg)  |
| RCC954ACSR | 36"      | 750 kcmil     | 750 kcmil  | 954 kcmil | 1.54"              | 13 lbs.   |
|            | [915 mm] | [500 mm]      | [500 mm]   |           | [39 mm]            | (6.0 kg)  |
| RCC1000    | 32"      | 1000 kcmil    | 1000 kcmil | _         | 1.90″              | 9.0 lbs.  |
|            | [813 mm] | [48 mm]       | [48 mm]    |           | [48 mm]            | (4.0 kg)  |

N-54